




Flex augers

A high quality flex auger is superior to any other transport and feeding systems when it comes to strength and reliability.

When the quality of the auger itself is of a good quality, and the engine and the gear is of good quality as well, there is no other system transporting pelletized products as fast, reliable and over as long distances as a flex auger.

For especially demanding tasks the augers can be delivered with pipes made from steel. The flex auger is driven by a very reliable engine and a gear that is lubricated for life.

A wide range of accessories and variety of models enables us to solve even the most complicated transportation and feeding tasks in a very simple and efficient manner.

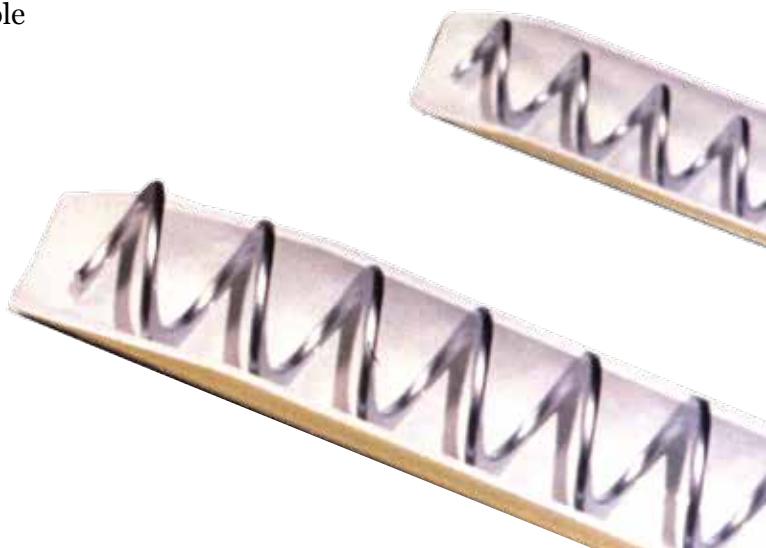

DACS 
INNOVATION IN VENTILATION

Falkevej 18 +45 7577 1922
8766 Nr. Snede mail@dacs.dk
Denmark www.dacs.dk

TECHNICAL SPECIFICATIONS

| Type | 55 mm | 75 mm | 90 mm | 125 mm |
|-------------|-------------------|-----------------|-----------------|------------------|
| Radius | 1.8 m/3 m | 1.8 m | 1.8 m | 1.8 m |
| Max. length | 77 m | 61 m | 46 m | 46 m |
| Motor | 0.5 hp 0.37 kW | 1 hp 0.75 kW | 1 hp 0.75 kW | 1.5 hp 1.1 kW |
| Performance | 450 kg/h | 1300 kg/h | 2700 kg/h | 6000 kg/h |



DACS 
INNOVATION IN VENTILATION

Falkevej 18 +45 7577 1922
8766 Nr. Snede mail@dacs.dk
Denmark www.dacs.dk